


# LINES FOR FILLING AND CLOSING

## Line LR series, type LR.2M

### Line LR.2M

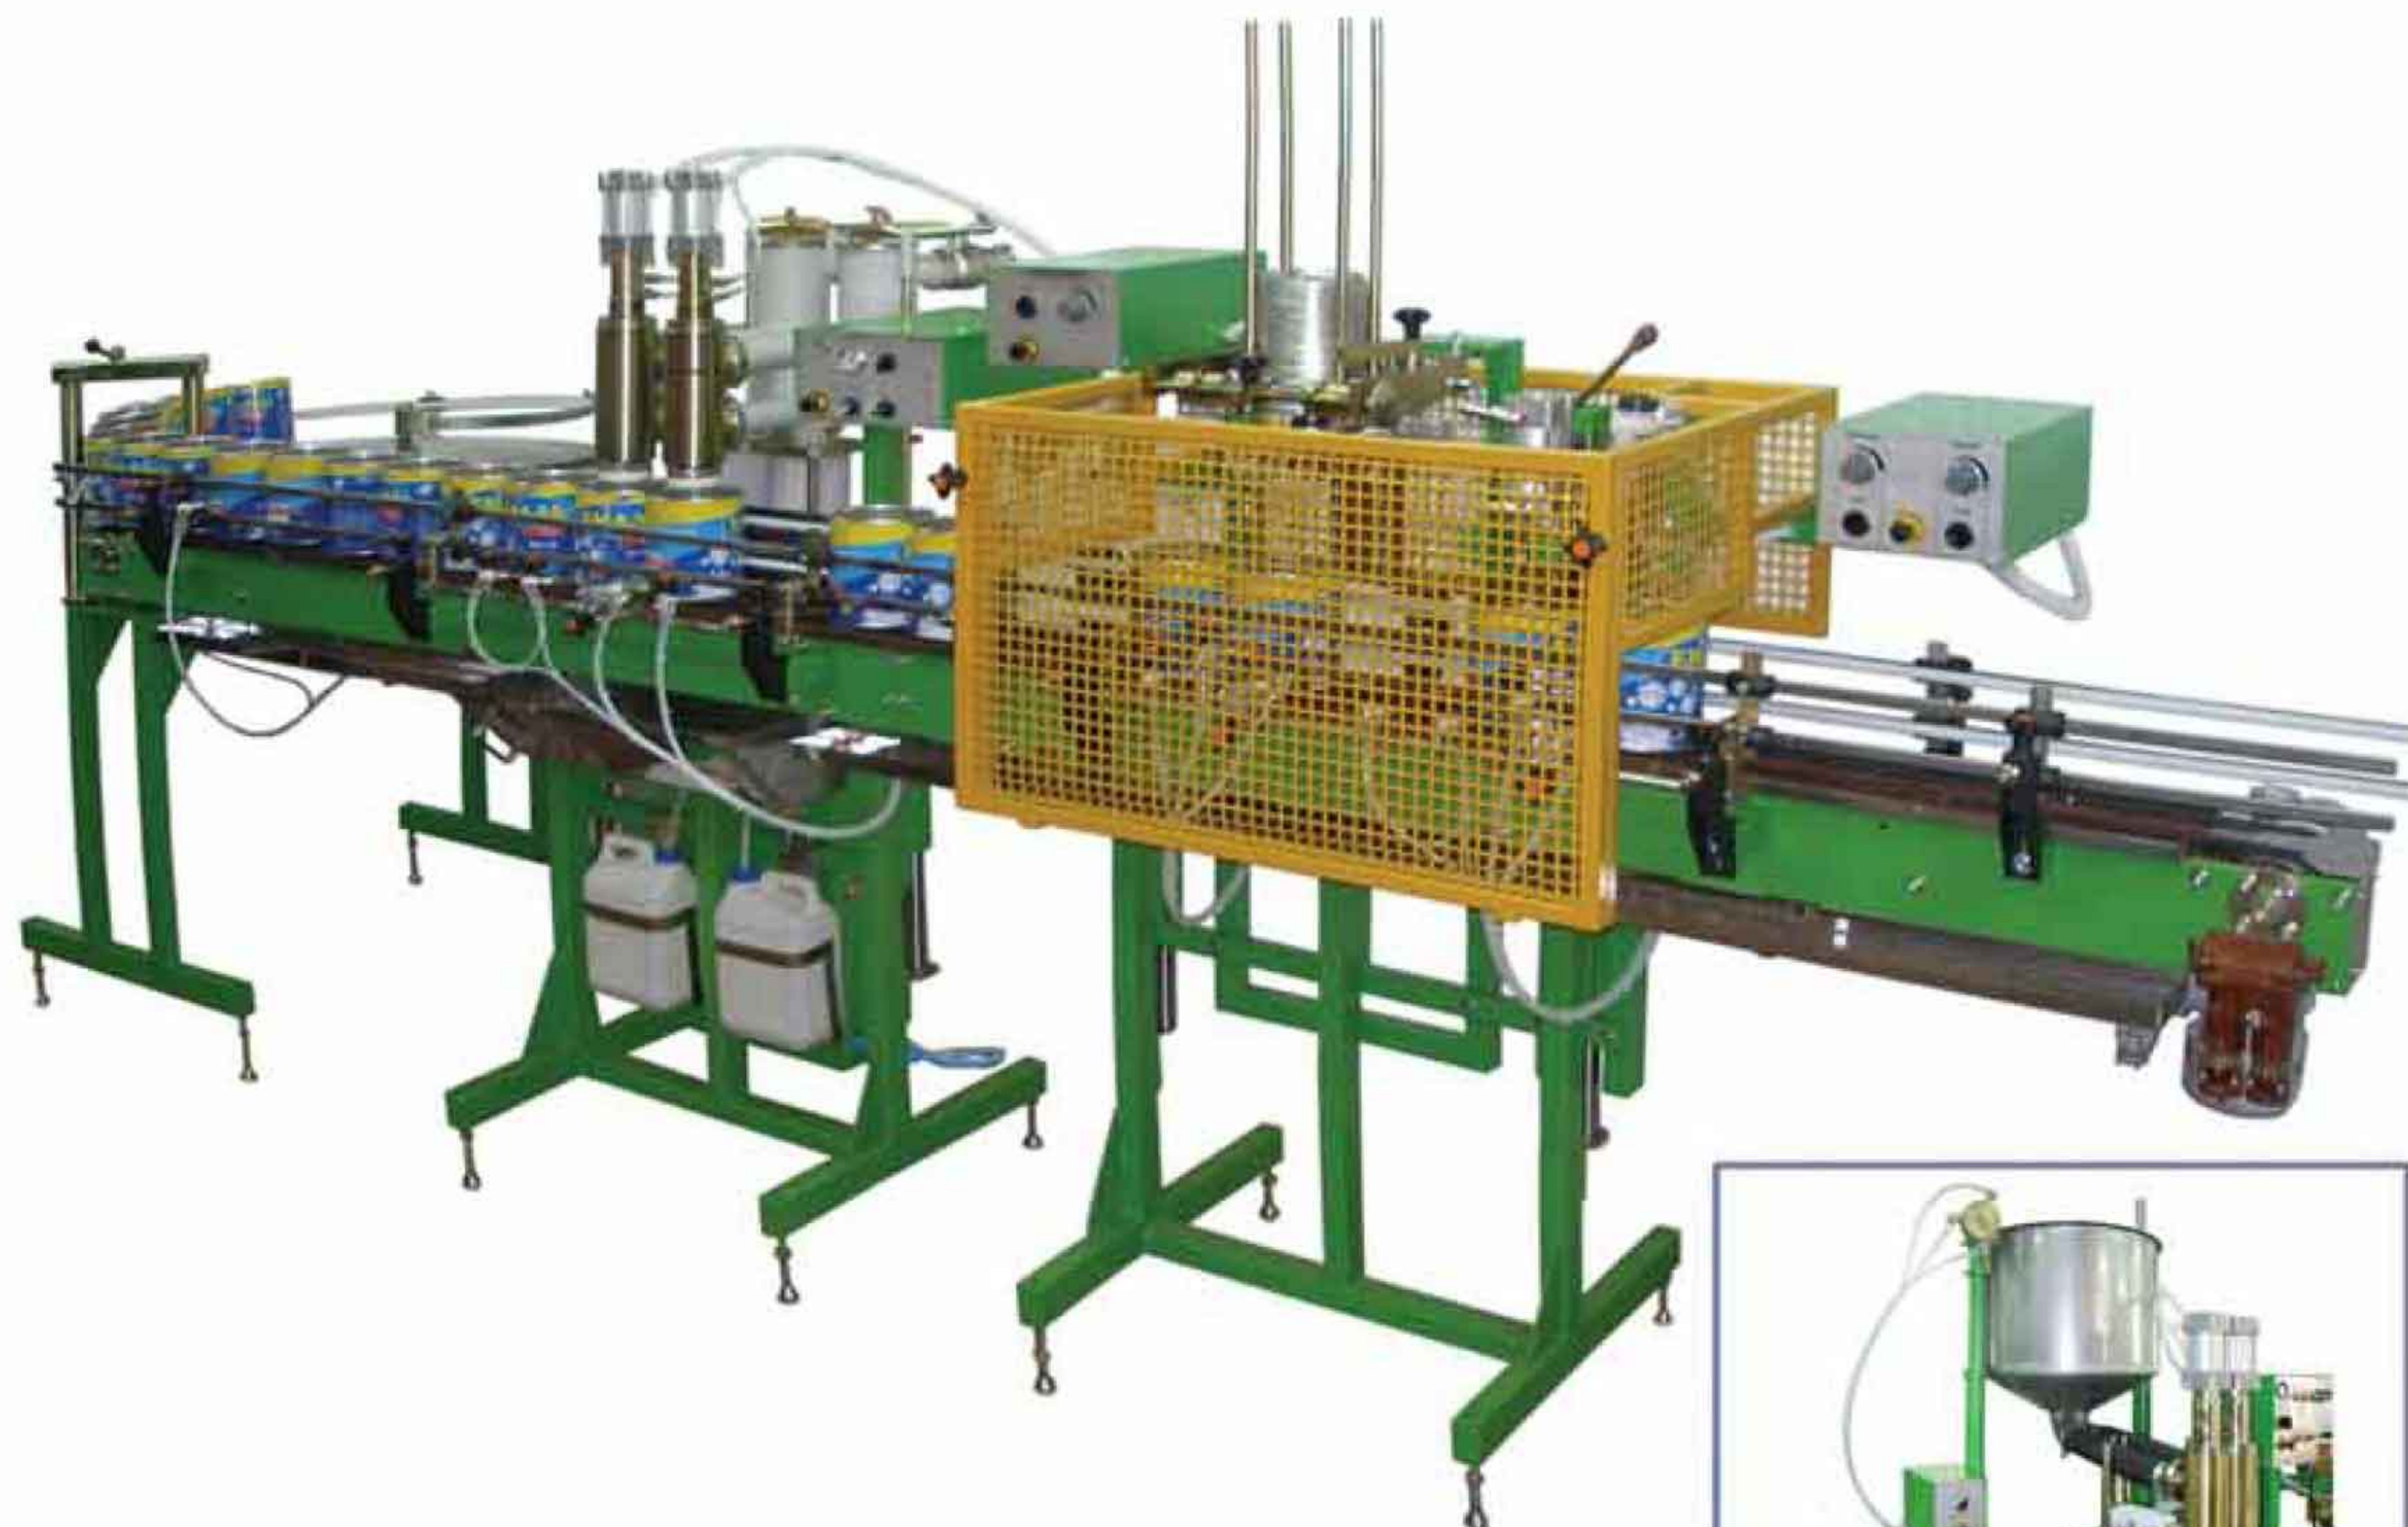

13

### INTENDED USE

Complex automatic line LR.2M is intended for filling and corking of various containers low-viscosity chemical and technical liquids without abrasive inclusions automatically, such as primers, enamels, paints, solvents, polyvinylacetate glue, technical oils, etc. Line performs the following operations:

- clearing from admixtures;
- can feed from the store to the conveyor;
- simultaneous filling of two cans;
- cover feed to filled cans (is set to customer's order );
- closing of cans;
- color marking of cans with blocking of work in case of absence of a cover;
- calculation of the closed cans.



volumetric

### TECHNICAL CHARACTERISTICS

	LR.1	LR.2M
Volume of dose (continuously adjustable), sm <sup>3</sup>	250-1000	250-2820
Dosing error, % not more	± 0,5	± 0,5
Pressure of compressed air, kg/sm <sup>2</sup>	5÷6	5÷6
Consumption of compressed air, not more m <sup>3</sup> /h	30	30
Installed power of electric motor, kW	0,37	0,37
Overall dimensions, mm at most	4300×1300×2500	4000×1400×1700
Weight, kg, not more	570	700

**SERVICE CONDITIONS :** Machine is completely adapted for EX explosive environment operation (Russian GOZGORTECHNADZOR Certificate)

